






Product info

- Projection 192 mm
- 2 functions
- Simultaneous utilization by 2 outlets
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- Flow rate for bath spout at 3 bar: 20 l/min
- Flow rate of hand shower at 3 bar: 16 l/min
- Min. operating pressure: 1 bar / max. 10 bar
- Safety lock at 40° C
- Temperature limitation adjustable
- With isolated water conduction
- Non-return valve
- Surface of the shelf -000 = white glass
- DN15 \cdot dirt filter included

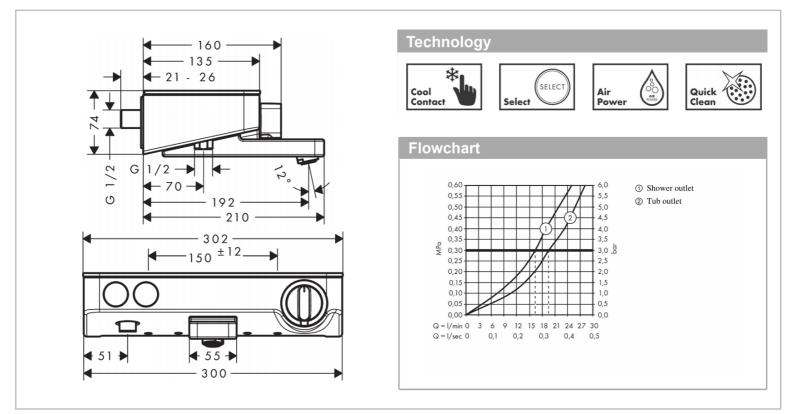

Flushing of pipe must be done before fittings are installed. Failure to do so voids the warranty.

Follow cleaning instructions and avoid using any harmful chemicals.

All information is for reference only. Installation shall always be based on the specs provided with actual delivered items. For more info, visit **www.kuysen.com**

hansgrohe