


## hansgrohe





## Product info

- 1 function
- Volume control for 1 outlet
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- EcoStop button limits the water consumption to 10 l/ min
- Maximum flow rate at 3 bar: 12 l/min
- Flow rate hand shower connection at 3 bar: 12 l/min
- Thermostat cartridge, ceramic valve 180° · safety lock at 40° C
- Temperature limitation adjustable
- With isolated water conduction
- Non-return valve  $\cdot$  with silencer
- Shelf made of safety glass
- Surface of the shelf -400 = white glass
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- Dirt filter included

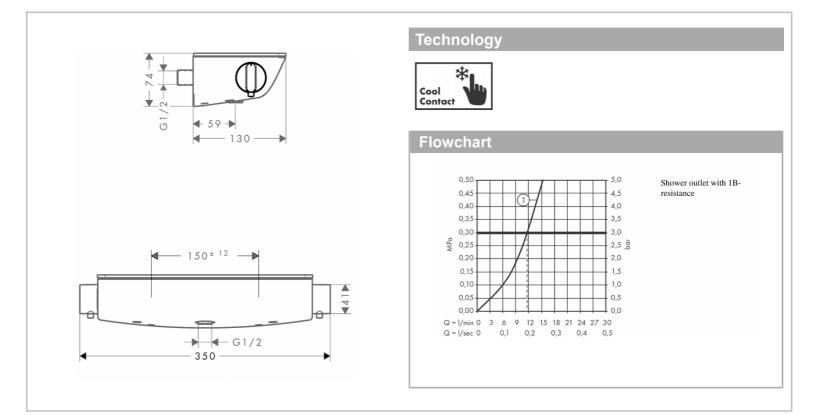

Flushing of pipe must be done before fittings are installed. Failure to do so voids the warranty.

Follow cleaning instructions and avoid using any harmful chemicals.

All information is for reference only. Installation shall always be based on the specs provided with actual delivered items. For more info, visit **www.kuysen.com**