


SPECIFICATION SHEET - fittings

insgrohe	Product Photo:
ny	1
ad Showers	
Select glass thermostatic hillow for concealed on for 1 outlet and additional pottom function &1add'l essure: 1~5 bar (15~70 psi) e: 59 l/min	
100	(A)
Chrome	
x 156mm	
00 iBox	
	table for contingue flow water be

Technical Informations: Suitable for continous flow water heater

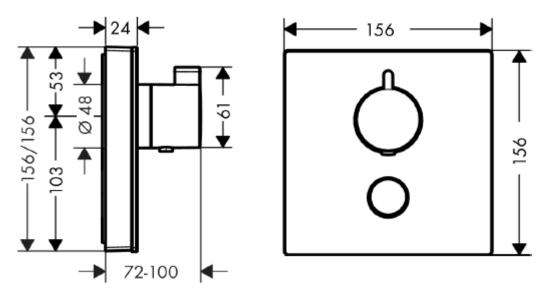

REMINDER:	Pipe flushing must be done before faucets are installed. Failure to do so voids the warranty.
	Do not use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other
	products not recommended for chrome.
	All information is for reference only, installation shall always be based on the actual product delivered.