


**DuraStyle Two-piece toilet # 216051..00 / 216051..85**

| < 385 mm > |

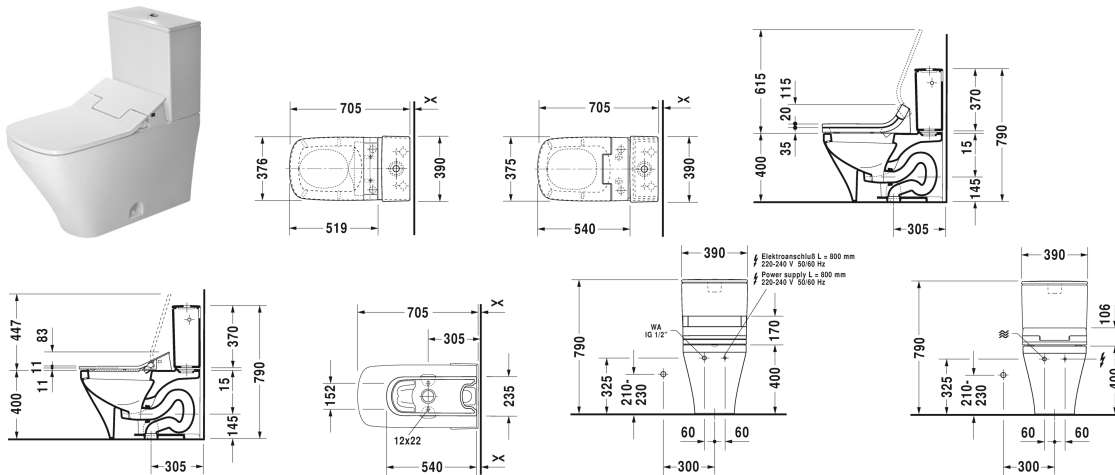

Two-piece toilet	Dimension	Weight	Order number
US-version, elongated with syphonic jet action, only in combination with SensoWash, 305 mm/12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet			
<b>Colors</b>			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
<b>Variant</b>			
◆ 1,32/0,92 gpf (5/3,5 lpf), with dual flush piston valve, top flush	385 x 700 mm	41.700 kilogram	216051..00
◆ 1,28 gpf (4,8 lpf), with Single Flush piston valve, top flush	385 x 700 mm	41.700 kilogram	216051..85
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
<b>Accessory</b>			
Mounting set for One-piece and Two-piece toilets, 1/2", ASIA-version		0.480 kilogram	001416
Mounting set for One-piece and Two-piece toilets, Outflow 3/8" - external thread, Wall Connection 1/2" - internal thread, 1/2", US-version		0.480 kilogram	001417
<b>Suitable products</b>			
Cistern for bottom left supply, 390 x 170 mm	390 x 170 mm		093520

**DuraStyle Two-piece toilet # 216051..00 / 216051..85**

|&lt; 385 mm &gt;|

SensoWash Starck C shower toilet seat for DuraStyle* with concealed connections, Remote control included, Electromotive actuated seat and lid, Rear-, Lady- and Comfortwash, individual adjustment of water-, air- and seat temperature as well as spray wand position and water spray intensity, Self-cleaning spray wand, 2 individually programmable user profiles, Night light, Quick release: easy seat unit removal, on / off-button, 376 x 519 mm	376 x 519 mm	610200
SensoWash Slim shower toilet seat for DuraStyle* with concealed connections, Remote control included, Self-cleaning spray wand, Locking function via remote control, Rear-, Lady- and Comfortwash, with soft closure, Night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prologed disuse, on / off-button, 375 x 540 mm	375 x 540 mm	611200

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.*

<b>REMINDER:</b>	<b>Pipe flushing must be done before faucets are installed. Failure to do so voids the warranty.</b>
	Do not use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome.
	All information is for reference only, installation shall always be based on the actual product delivered.