


**SensoWash® Slim SensoWash Slim shower toilet seat for ME by Starck, Starck 2, Starck 3 and Darling New\* #**  
611000001001300 / 611000002000300 / 611000002004300

| < 373 mm > |

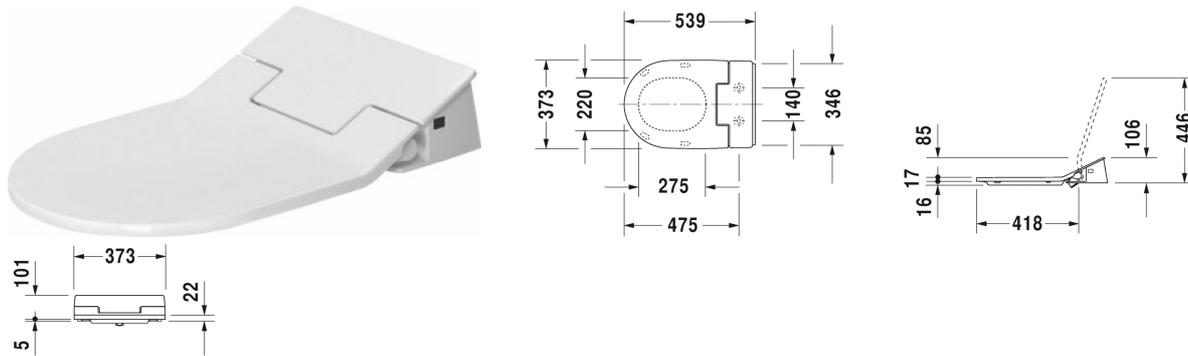

SensoWash Slim shower toilet seat for ME by Starck, Starck 2, Starck 3 and Darling New*	Dimension	Weight	Order number
with concealed connections, Remote control included, Locking function via remote control, Rear-, Lady- and Comfortwash, Self-cleaning spray wand, with soft closure, Night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prologed disuse, on / off-button			
<b>Colors</b>			
00 White Alpin			
<b>Variant</b>			
120V 60Hz, **, Individual adjustment of water temperature as well as spray wand position and water spray intensity	373 x 539 mm	5.500 kilogram	611000001001300
220-240V 50/60Hz, **, Individual adjustment of water temperature as well as spray wand position and water spray intensity	373 x 539 mm	5.500 kilogram	611000002000300
220-240V 50/60Hz, Protection device according EN 1717 integrated, Individual adjustment of water temperature as well as spray wand position and water spray intensity	373 x 539 mm	5.500 kilogram	611000002004300
<b>Infobox</b>			
Install a water softener with water hardness $\geq 2.4$ mmol/l ( $\geq 14^\circ$ dH or $24^\circ$ fH).			
<b>Suitable products</b>			
Toilet wall mounted for SensoWash® washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, EWL class 1, 370 x 625 mm	370 x 625 mm		254459
Toilet wall mounted for SensoWash® washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, EWL class 1, 370 x 620 mm	370 x 620 mm		222659

**SensoWash® Slim SensoWash Slim shower toilet seat for ME by Starck, Starck 2, Starck 3 and Darling New\* # 611000001001300 / 611000002000300 / 611000002004300**

|< 373 mm >|

Toilet close-coupled for SensoWash® (without cistern), washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, fixings included, EWL class 1, 370 x 725 mm	370 x 725 mm	212959
Toilet wall mounted for SensoWash® washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, EWL class 1, 375 x 620 mm	375 x 620 mm	253359
Toilet wall mounted for SensoWash® washdown model, Durafix included, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, EWL class 1, 4,5 l, 370 x 570 mm	370 x 570 mm	252859
Toilet wall mounted Duravit Rimless for SensoWash® rimless, washdown model, Durafix included, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, EWL class 1, 370 x 570 mm	370 x 570 mm	252959
Toilet floor standing for SensoWash® back to wall, washdown model, fixings included, horizontal outlet, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, EWL class 1, 370 x 600 mm	370 x 600 mm	216959
Two-piece toilet for SensoWash® (without cistern), US-version, elongated with syphonic jet action, 305 mm/12" rough-in, vertical outlet, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, 360 x 710 mm	360 x 710 mm	217151
One-piece toilet Duravit Rimless for SensoWash® rimless, connecting elements for SensoWash with concealed connections included, US-version, elongated with syphonic jet action, 305 mm/12" rough-in, only in combination with SensoWash, with dual flush piston valve, top flush, vertical outlet, 1,32/0,92 gpf (5/3,5 lpf), 360 x 730 mm	360 x 730 mm	217351
Toilet wall mounted Duravit Rimless for SensoWash® rimless, washdown model, Durafix included, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, EWL class 1, 370 x 570 mm	370 x 570 mm	256359

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.*

<b>REMINDER:</b>	<b>Pipe flushing must be done before faucets are installed. Failure to do so voids the warranty.</b>
	Do not use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome.
	All information is for reference only, installation shall always be based on the actual product delivered.