


SensoWash® Slim SensoWash Slim shower toilet seat for P3 Comforts* # 611400001001300 / 611400002000300 / 611400002004300

| < 386 mm > |

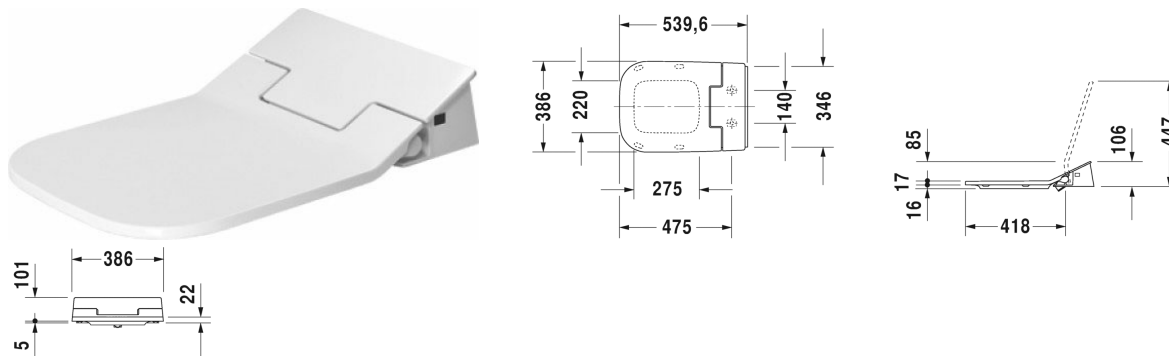

SensoWash Slim shower toilet seat for P3 Comforts*	Dimension	Weight	Order number
with concealed connections, Remote control included, Locking function via remote control, Rear-, Lady- and Comfortwash, Individual adjustment of water temperature as well as spray wand position and water spray intensity, Self-cleaning spray wand, with soft closure, Night light, Seat and lid easy removable one-handed, Automatic drainage in periods of prologed disuse, on / off-button			
Colors			
00 White Alpin			
Variant			
120V 60Hz, **	386 x 540 mm	5.500 kilogram	611400001001300
220-240V 50/60Hz, **	386 x 540 mm	5.500 kilogram	611400002000300
220-240V 50/60Hz, Protection device according EN 1717 integrated	386 x 540 mm	5.500 kilogram	611400002004300
Infobox			
Install a water softener with water hardness ≥ 2.4 mmol/l ($\geq 14^\circ$ dH or 24° fH).			
Suitable products			
Toilet wall mounted Duravit Rimless for SensoWash® rimless, washdown model, Durafix included, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, EWL class 1, 380 x 570 mm	380 x 570 mm		256159
Toilet floor standing Duravit Rimless for SensoWash® rimless, back to wall, fixings included, washdown model, connecting elements for SensoWash with concealed connections included, horizontal outlet, only in combination with SensoWash, EWL class 1, 380 x 600 mm	380 x 600 mm		216659

SensoWash® Slim SensoWash Slim shower toilet seat for P3 Comforts* # 611400001001300 / 611400002000300 / 611400002004300

|< 386 mm >|

Two-piece toilet for SensoWash® (without cistern), connecting elements for SensoWash with concealed connections included, US-version, elongated with syphonic jet action, only in combination with SensoWash, 305 mm/12" rough-in, vertical outlet, 380 x 710 mm	380 x 710 mm	216851
One-piece toilet Duravit Rimless for SensoWash® US-version, connecting elements for SensoWash with concealed connections included, elongated with syphonic jet action, 305 mm/12" rough-in, only in combination with SensoWash, vertical outlet, 380 x 710 mm	380 x 710 mm	217551

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.

REMINDER:	Pipe flushing must be done before faucets are installed. Failure to do so voids the warranty.
	Do not use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome.
	All information is for reference only, installation shall always be based on the actual product delivered.