
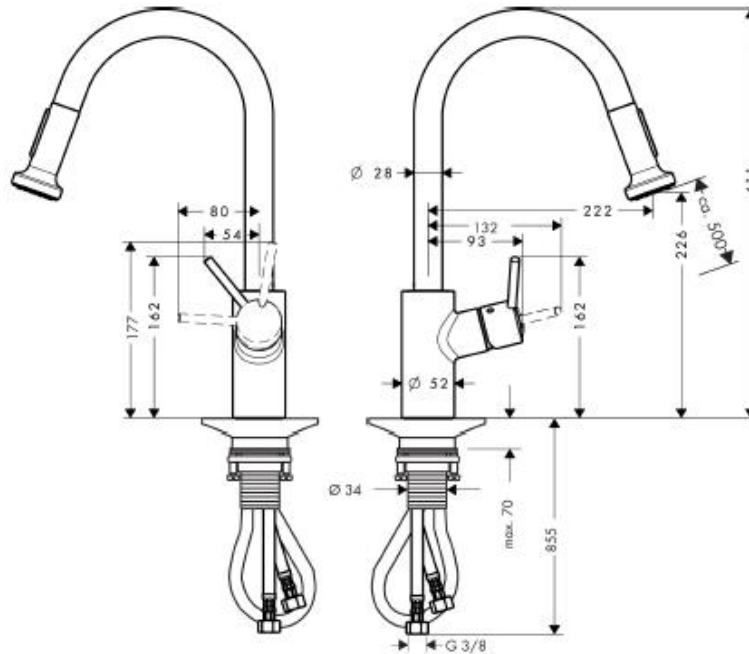


## SPECIFICATION SHEET - fittings

<b>BRAND:</b>	<b>hansgrohe</b>	<b>Product Photo:</b>  
<b>ORIGIN:</b>	Germany	
<b>SERIES:</b>	<b>Talis S<sup>2</sup> Variarc</b>	
<b>PRODUCT DESCRIPTION:</b>	Single lever kitchen mixer with pullout spray • swivel C-spout range 150° • can be laid flat in front of window • normal and spray jet • flow rate: 11 l/min at 3 bars (45 psi) • flow pressure 1~5 bars (15~70 psi)	
<b>MODEL No.</b>	14877 000	
<b>FINISH/COLOUR:</b>	Chrome-plated	
<b>DIMENSIONS:</b>	411mm height 232mm spout projection	
<b>OPTIONAL MATCHING PARTS:</b>	2x angle valve ½"x10mm (no nuts)	

**Technical Informations:** Suitable for continous flow water heaters



**REMINDER:** Pipe flushing must be done before faucets are installed. Failure to do so voids the warranty.  
 Do not use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome.  
 All information is for reference only, installation shall always be based on the actual product delivered.