




## SPECIFICATION SHEET

<b>BRAND:</b>		<b>Product Photo:</b> 
<b>ORIGIN:</b>	USA	
<b>SERIES:</b>	<b>82V</b>	
<b>PRODUCT DESCRIPTION:</b>	capacity: 50 gallons Rheemglas enamel tank dual copper heating element (4.5kW) Temperature and pressure relief valve included heat up time to 60°C: 1 hr. 40 mins.	
<b>MODEL No.</b>	82V52-2	
<b>FINISH/COLOUR:</b>	gray	
<b>DIMENSIONS:</b>	diameter x height: 1448 mm x 483 mm	
<b>OPTIONAL MATCHING PARTS:</b>		

**Technical Informations:** Suitable for continous flow water heater  
 maximum pressure of 150 PSI (10 bar)  
 Wattage: 4,500 watts  
 Voltage: 240V

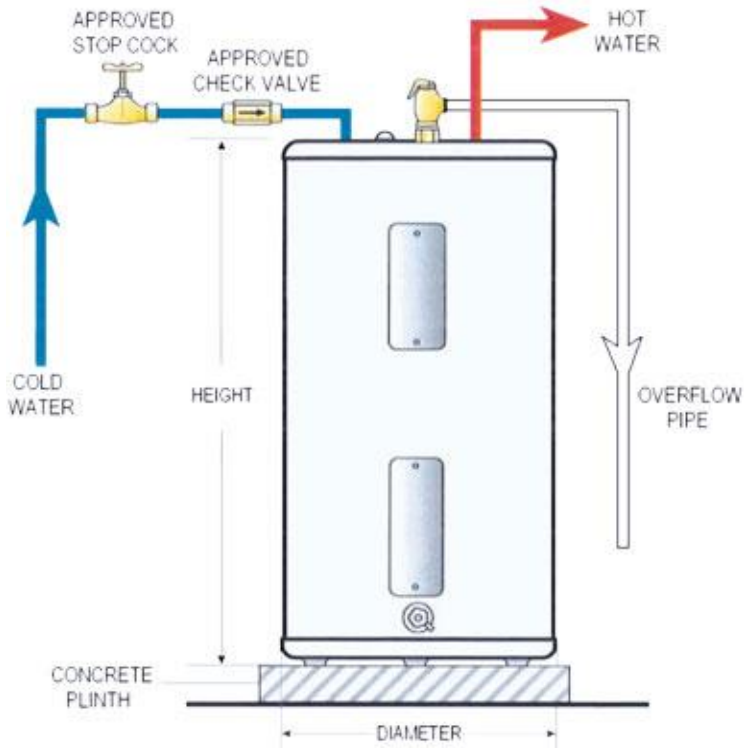

**REMINDER:** Water heater tank must be filled with water before turning it on to avoid dry firing of the heating element.  
 Do not use abrasive or aggressive cleaners and or contain chlorine or hydrochloric acid solution for cleaning.  
 All information stated above are solely for reference only, and should be based on the actual submission sample. Dimensions and specifications are subject to change without prior notice.