



Brand: Axor, Germany

Name: Thermostat HighFlow for concealed

installation softsquare

Item Code: 36775.140

Designer:

Color / Finish: Brushed Bronze

Dimensions: (See data drawing below)

Product info:

· Water flow control with stop function

· Thermostat cartridge

Flow rate upper outlet: 27 l/min

• Flow rate lower outlet: 27 l/min

• Flow rate by simultaneous use of all outlets 34, 8 l/min

• Maximum flow rate at 3 bar: 27 l/min

• Min operating pressure: 1 bar

• Max operating pressure: 10 bar

· Flat escutcheon for more space in the shower

Escutcheon can be aligned by +/-3

• Easy installation due to pre-assembled function block

· Temperature limitation adjustable

· Material button: metal


· Material handles: metal

Connection type: basic set iBox universal 2 (#01400180)

 Handles always at the same height regardless of the installation depth of the basic set

· Safety stop at 40 C



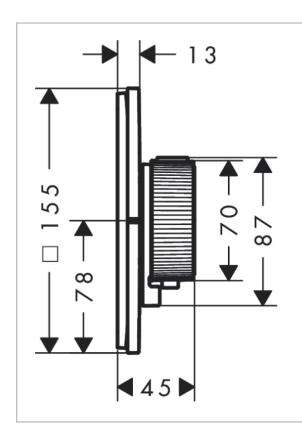

Technology




Safety 40°C



Water Flow Control

Flowchart



Follow cleaning instructions and avoid using any harmful chemicals.

All information is for reference only. Installation shall always be based on the specs provided with actual delivered items. For more info, visit **www.kuysen.com**