


hansgrohe

Product info:

- consists of overhead shower, wall connector
- spray type: Powder Rain, Intense Powder Rain
- Fast Drain empties the overhead shower from an angle of 10°
- ball-joint: overhead shower angle adjustable
- maximum flow rate at 3 bar: 11,3 l/min
- flow rate Powder Rain spray (at 3 bar): 11,3 l/min
- flow rate Intense Powder Rain (at 3 bar): 7,2 l/min
- function from: 6,3 l/min
- minimum flow pressure: 1,4 bar
- overhead shower removable for cleaning
- installation: wall-mounted based on iBox
- connection type: basic set
- suitable for continuous flow water heaters

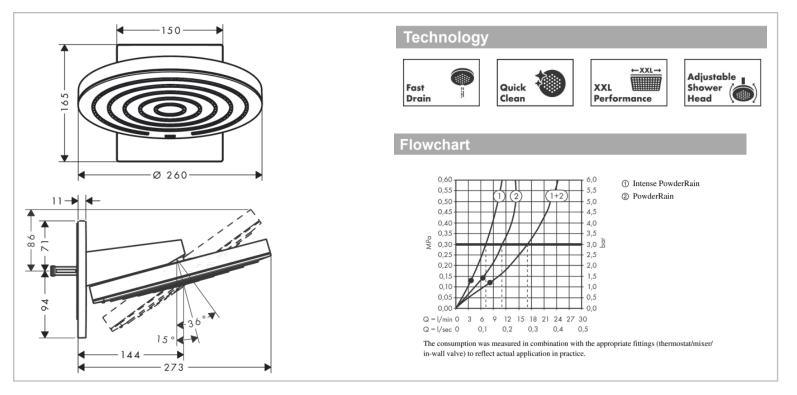

Flushing of pipe must be done before fittings are installed. Failure to do so voids the warranty.

Follow cleaning instructions and avoid using any harmful chemicals.

All information is for reference only. Installation shall always be based on the specs provided with actual delivered items. For more info, visit **www.kuysen.com**