





- Consists of overhead shower, hand shower, shower thermostat, slider, shower hose, shower bar
- Spray type overhead shower: RainAir, or PowderRain
- Spray disc surface: graphite
- Flow regulator: 12 l/min (with possible tolerances $\pm 10\%$)
- Flow rate PowderRain spray at 3 bar: 11,8 l/min
- Spray type hand shower: RainAir, PowderRain, Massage spray
- Flow rate of hand shower at 3 bar: 10,5 l/min
- Maximum flow rate for Showerpipe at 3 bar: 12 l/min
- Minimum flow pressure: 1 bar
- Max. operating pressure: 10 bar
- Mounting type: exposed installation
- Connection dimension: DN15




Flowchart

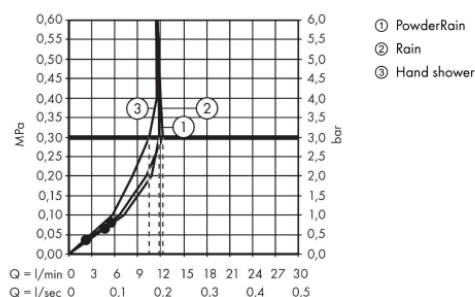


Follow cleaning instructions and avoid using any harmful chemicals. Failure to do so voids the warranty
All information is for reference only. Installation shall always be based on the specs provided with actual delivered items.
For more info, visit www.kuysen.com

Brand : Hansgrohe, Germany
 Name : Raindance Alive S overhead shower
 300 1jet
 Item Code : 24520.140
 Color/Finish : Brushed bronze
 Dimensions: Shower head size: 300 mm

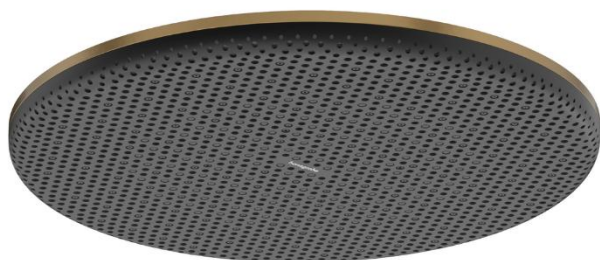


Product info:


- Spray type: RainAir, or Powder Rain
- Spray type switch: allows the spray type to be changed even after installation, RainAir (preset)
- Flow regulator: 12 l/min (with possible tolerances $\pm 10\%$)
- Flow rate: PowderRain spray at 3 bar: 11 l/min
- Flow rate: RainAir spray at 3 bar: 10,5 l/min
- Function from: 5,4 l/min
- Maximum flow rate at 3 bar: 11 l/min
- Minimum flow pressure: 0,6 bar
- Material spray disc: anodized aluminium
- Overhead shower angle adjustable
- installation: ceiling or wall
- Connection thread: G $\frac{1}{2}$
- Suitable for continuous flow water heaters

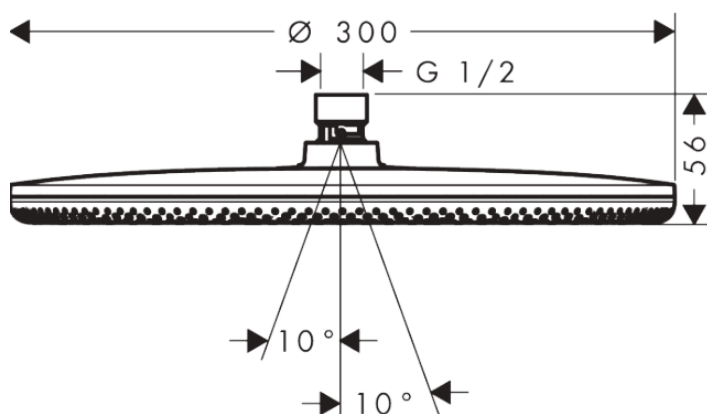

Technology



Flowchart

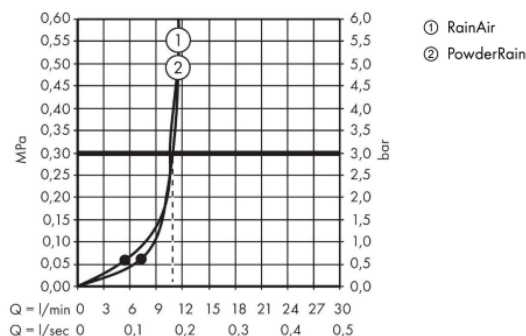

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.