




Item Code : 27633.140
Color/Finish : Brushed Bronze
Dimensions: (See data drawing below)

- Consists of overhead shower, hand shower, shower thermostat, shower hose, hand shower holder
- Overhead shower Raindance S240, 240mm
- Spray type overhead shower: PowderRain
- Spray type hand shower: Rain, PowderRain, Whirl
- Swiveling shower arm length: 460 mm
- Maximum flow rate at 3 bar: 16 l/min
- Flow rate PowderRain spray (at 0.3 bar): 16 l/min
- Operating pressure: min. 1 bar/max. 10 bar
- Thermostat Ecostat Comfort
- Safety lock at 40° C
- Adjustable hot water limitation
- Outlets controlled via turning handle

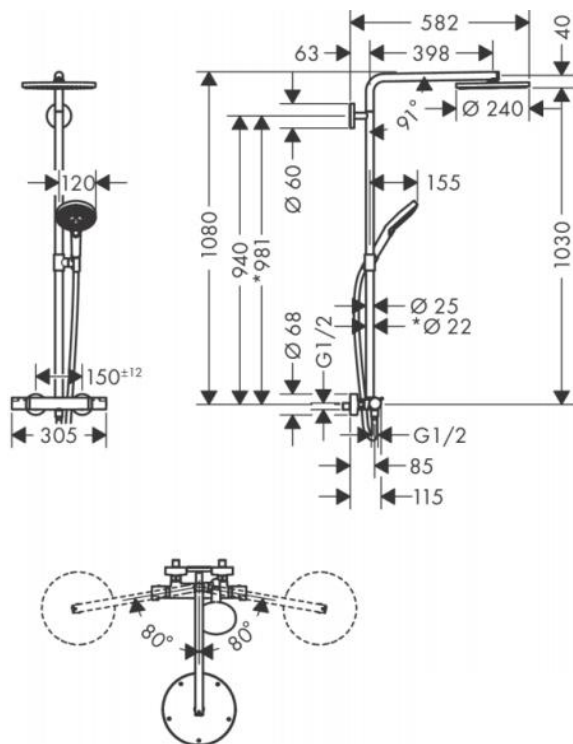

The graph plots pressure against flow rate for two types of showers. The y-axis represents pressure in MPa (0.00 to 0.60) and bar (0.0 to 6.0). The x-axis represents flow rate in l/min (0 to 30) and l/sec (0 to 0.5). Curve 1 (Hand shower) shows a steep increase in pressure with flow rate. Curve 2 (Overhead shower) shows a more gradual increase. A horizontal line at 3.0 bar (0.3 MPa) intersects both curves, with vertical dashed lines extending to the x-axis to indicate the corresponding flow rates.

Flow Rate (l/min)	Flow Rate (l/sec)	Pressure (MPa) - Hand shower (1)	Pressure (bar) - Hand shower (1)	Pressure (MPa) - Overhead shower (2)	Pressure (bar) - Overhead shower (2)
0	0.0	0.00	0.0	0.00	0.0
6	0.1	0.10	1.0	0.08	0.8
12	0.2	0.45	4.5	0.15	1.5
18	0.3	-	-	0.28	2.8
21	0.35	-	-	0.30	3.0

Follow cleaning instructions and avoid using any harmful chemicals. Failure to do so voids the warranty
All information is for reference only. Installation shall always be based on the specs provided with actual delivered items.
For more info, visit www.kuysen.com